



ADVATEK PIXLITE R4D-S

Long Range Receiver

SKU: ENV-ADV-R4DS

Product Data

Pixel Outputs:	4 x Powered
Data Input (From PixLite Transmitter):	1 x RJ45
Dimensions exc. connectors:	95 x 78 x 33mm
Weight:	0.2kg
Enclosure:	High Strength ABS
Mounting:	Wall & Din-Rail Mountable
Input Power:	5V - 24V DC
Per Output Current Limit:	7.5A (Mini Blade Fuse)
Storage Temp:	-20°C to +55°C
Ambient Operating Temp:	-20°C to +55°C
Pixel Output:	4 Expanded Mode
RGB Pixels per Output:	510 Expanded Mode
RGBW Pixels per Output:	384 Expanded Mode
Universes per Pixel Output:	3 Expanded Mode
Total Pixel Universes:	12
Installations	Indoors Only
Certificates:	ETL Listing (Equivalent to UL Listing), CE, FCC, ICES3, RCM, UKCA
Warranty:	5 years



5 Year
Warranty


4 FULL
PIXEL
OUTPUTS

Up to 12
Universes


IP20

Key Features

- Receive Data up to 300m from Transmitter
- 12 Universes Data-Only Pixel
- Power In and Fuse Good LED Indicators
- Electrical Fault Protection on all Ports

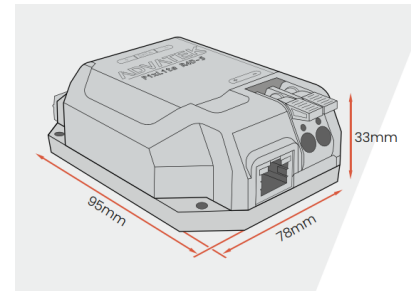

MOUNTING DIMENSIONS

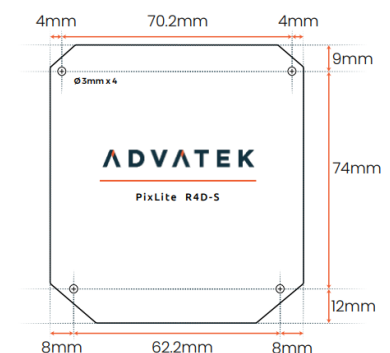

[VIEW PRODUCT OVERVIEW](#)