



DiGidot C4 Extended

Available with 2, 4, 8 or 12 Universes

SKU: ENV-DD-C4-EXT (2/4/8/12)

Product Data

Input Voltage:	5-24 VDC
Max Power Consumption:	5W
Housing Material:	ABS
Dimensions:	153 x 74 x 28mm
Wiring:	Max 2.5mm ² 14 AWG
Weight:	140g
Mounting:	DIN rail or surface mounted
Operation Temperature:	0 to 50°C
Ambient Temperature:	40°C
Storage Temperature:	-20 to 50°C
Operating Relative Humidity:	90% (indoor use only)
IP Rating:	IP10
Input Protocols:	Art-Net 1,2,3 & 4 DMX512 (2 inputs)
Output Protocols:	Art-Net 1,2,3 & 4 (out/through) DMX512 (2 outputs) DMX TTL (4 outputs) 59+ SPI protocols
Output Channels:	512 / 1048 / 2048 / 4096 Art-Net and/or up to 1024 DMX channels
Ethernet:	RJ45 compatible, 10/100 Base-TX Ethernet with static IP address or smart DHCP
Wi-Fi:	10/100 Base Ethernet with static IP address. Wi-Fi Protocols 802.11 b/g/m (HT20)
Frequency Range:	2.4 GHz - 2.5 GHz (2400M - 2483.5m)
TX Power:	Max. +20 dBm
Antenna:	On board
Wi-Fi security:	WPA, WPA2
Wi-Fi Mode:	Client + Access Point
Encryption:	WEP/TKIP/AES
Warranty	5 Years carry in factory warranty
Compliances	CE, RoHS, cETL US



UP TO
4096
CHANNELS



5 YEAR
WARRANTY

COMPACT

IP10

Key Features

- Over 59 Supported Protocols
- Art-Net + DMX in & out
- Wide Voltage Range
- Web interface & free App
- Analog & digital triggers
- Art-Net/DMX recording & playback

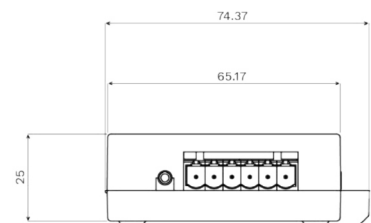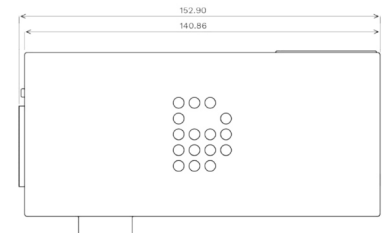

[VIEW PRODUCT OVERVIEW](#)