



Mean Well HDR-30 Series

30W Ultra Slim Step Shape DIN Rail
Available in 12V, 24V and 48V

SKU: ENV-HDR-30-(12/24/48)

DIN RAIL

3 YEAR
WARRANTY

ULTRA
SLIM




LED
INDICATOR

Product Data

DC Voltage:	12V 24V 48V
Rated Current:	2A 1.5A 0.75A
Current Range:	0 - 2A 0 - 1.5A 0 - 0.75A
Rated Power:	24W 36W 36W
Ripple & Noise:	120mVp-p 150mVp-p 240mVp-p
Voltage Adj Range:	10.8 - 13.8V 21.6 - 29V 43.2 - 55.2V
Frequency Range:	47 - 63Hz
Efficiency:	88% 89% 90%
Over Voltage:	15 - 18V 30 - 36V 57.6 - 67.2V
Working Temp.:	-30 - +70°C
Working Humidity:	20- 90% RH non-condensing
Storage Temp., Humidity:	-40 - +85°C, 10 - 95% RH non-condensing
Operating Altitude:	2000 meters
Safety Standards:	UL62368-1, UL508, TUV BS EN/EN61558-2-16, BS EN/EN61558-1, IEC62368-1, EAC TP TC 004, BSMI CNS15598-1 approved; Design refer to TUV BS EN/EN62368-1
Dimensions:	35 x 90 x 54.55mm (W x H x D)

Key Features

- Universal 85-264VAC input
- Slim 35.5mm width to save rail space
- Compact Housing
- High efficiency up to 88%
- Built-in short-circuit, overload and overvoltage protection
- Adjustable DC output range

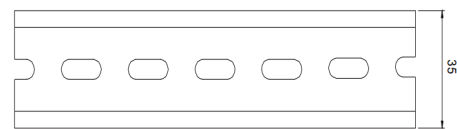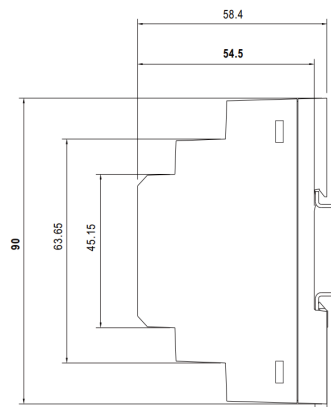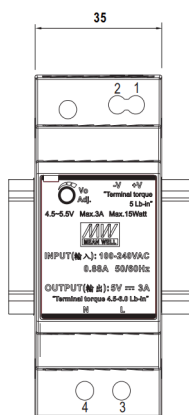

ADMISSIBLE DIN-RAIL: TS35/7.5 OR TS35/15



[VIEW PRODUCT OVERVIEW](#)