



MADRIX LUNA

The easy to use reliable network node

3 Versions Available: LUNA 4 | LUNA 8 | LUNA 16

SKU: ENV-LUNA-4, ENV-LUNA-8, ENV-LUNA-16



Product Data

Supply Of Power:	AC 100 V – 240 V, 50-60 Hz, 0.4 A max., IEC C14 inlet
Power Consumption:	< 5 W during normal operation
BTU/h:	5.50 (LUNA 4) 8.80 (LUNA 8) 10.20 (LUNA 16) during normal operation
Network Protocols:	Art-Net (I, II, 3, 4, incl. ArtSync), Streaming ACN (sACN / ANSI E1.31)
DMX512 (OUT):	4x / 8x / 16x 512 DMX channels output
DMX512 (IN):	1x 512 DMX channels input
Ports (OUT):	5-pin, XLR, female, NEUTRIK
Ports (IN):	5-pin, XLR, male, NEUTRIK
Case:	Metal enclosure (With attached brackets for 19" rack mounting)
Ethernet:	1x RJ45, Auto MDI-X, NEUTRIK etherCON, 10/100 MBit/s (Compatible with 1 GBit/s)
Ethernet Switch:	Lookup Table (ALU) for 4,096 unicast MAC addresses
Temperature Range:	-10 °C to 60 °C (14 °F to 140 °F) (Operating) -20 °C to 70 °C (-4 °F to 158 °F) (Storage)
Handling:	5 status LEDs
Dimensions (Body Only):	76 mm × 440 mm × 44 mm (3" × 17.32" × 1.75") (Length × Width × Height)
Dimensions (Total):	76 mm × 482.6 mm × 44 mm (3" × 19" × 1.75") (Length × Width × Height)
Dimensions (LUNA 16):	76 mm × 482.6 mm × 88 mm (3" × 19" × 3.5") (Length × Width × Height)
IP Rating	IP20
Weight	1.3 kg (2.87 lb) (LUNA 4) 1.4 kg (3.09 lb) (LUNA 8) 2.0 kg (4.41 lb) (LUNA 16)
Warranty	5 years of limited manufacturer's warranty



Key Features

- Stand-Alone Playback
- Live Recording
- Live Control
- Time Controlled Shows
- Scalable Synchronisation
- Flexible Remote Control

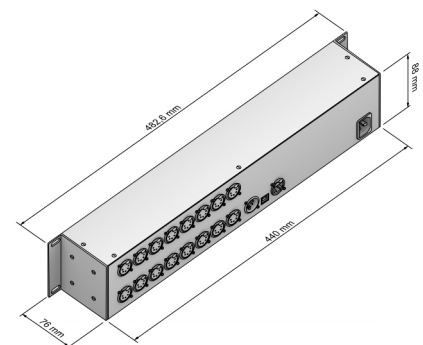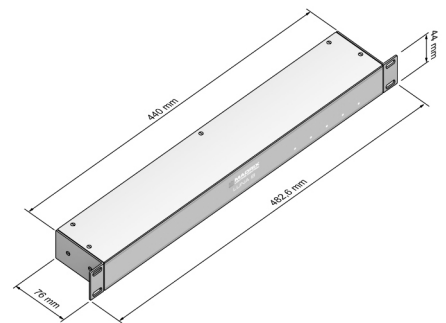

[VIEW PRODUCT OVERVIEW](#)